



Material: Mild steel
Finish: Zinc plated and passivated



Self Locking Nut (SL)

*When using SL type, we strongly recommend the use of a lubricant on threads (e.g. wax oil)
Add "SL" to part number when ordering*


ADVANTAGES

- Use where accurate hole alignment is impossible
- Ideal where positional adjustment is needed
- Self locking nut available - exit threads are deformed

FLOATING ANCHOR NUT

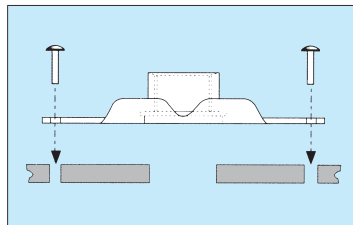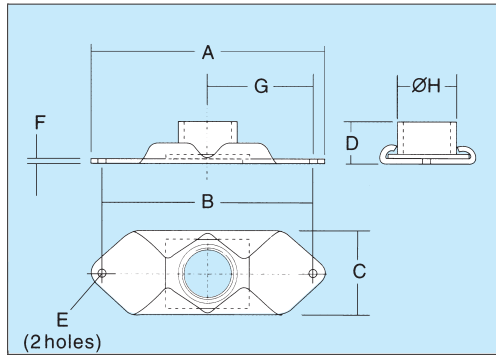

Drill or punch hole size to suit appropriate Floating Anchor Nut

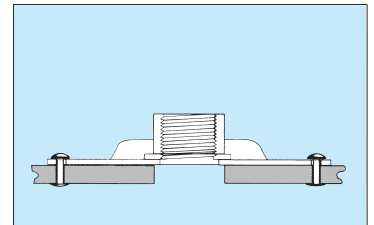

Secure the base plate to the parent material by whichever means is best suited to the application.

Thread	Part Number	Rec Hole Size +0.2 - 0.0	A ±0.1	B ±0.1	C ±0.1	D ±0.1	E ±0.1	F ±0.1	G ±0.1	H ±0.1	Floatability radially from centre
M3 x 0.5	FN3050	5.5	23.2	17	10.6	5.2	2.5	0.6	8.5	5.5	0.4
M4 x 0.7	FN4070	5.5	23.2	17	10.6	5.2	2.5	0.6	8.5	5.5	0.4
M5 x 0.8	FN5080	6.5	25.2	19	10.6	6.2	2.5	0.6	9.5	6.5	0.4
M6 x 1.0	FN6100	7.5	29.2	22	12.4	7	3.3	0.6	11	7.5	0.4

*Non metric threads and alternative finishes to order
All Dimensions are in millimetres*

AUTONIC ENGINEERING

COMPANY LIMITED

Autonic Engineering Company Limited
Salisbury Road, Rye Park, Hoddesdon, Hertfordshire. EN11 0HU UK
Tel: +44 (0)1992 471101 Fax +44 (0)1992 471102
Email: enquiries@autonic.co.uk www. autonic.co.uk